





Fix the bracket in camera setting place, and then set the camera in it.  
Installation is completed after adjusting the direction and tighten the screw.

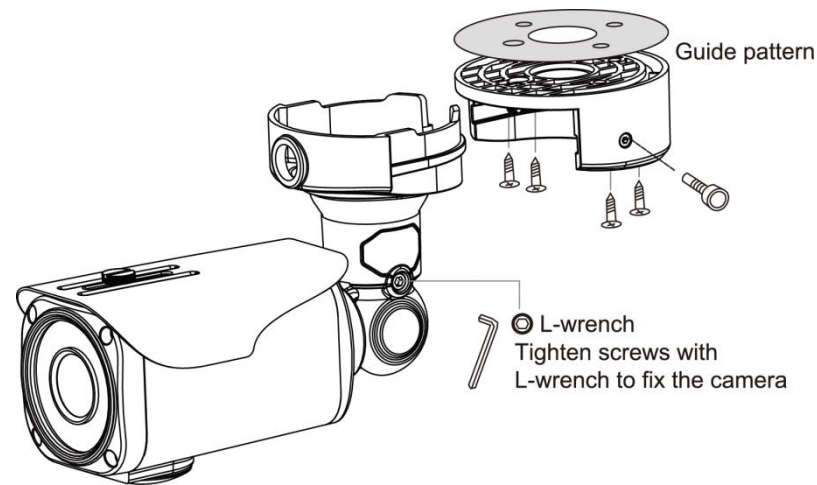

# UHD. 4K

IP68    Easy    Ceiling    Wall    Outdoor    IR 06

|                          |  |
|--------------------------|--|
| Resolution               | 2160P (EX-SDI UHD)   |
| Lens                     | Fixed lens 3.6mm, 4mm, 6mm / V/F Lens 2.8~8mm, 2.8~12mm, 3.5~16mm  |
| Sensor                   | 1/2.5 inch SONY CMOS (IMX-274)   |
| Effective Pixels         | 4074(H) X 3046(V) = 12.4M  |
| Scanning System          | PROGRESSIVE  |
| S/N (Y signal)           | More than 52 dB (AGC Off)  |
| Video Output             | EX-SDI UHD   |
| Min.Illumination         | 0 Lux at IR On (IR LED 06)   |
| White Balance            | Auto / Auto Ext / Preset / Manual  |
| Electronic shutter speed | AUTO / MANUAL (1/30sec ~ 1/30,000sec)  |
| Function                 | DNR / ACE / WDR / BLC / HLC / Privacy / Motion / RS-485 / Sharpness / Smart IR / Brightness                            |
| Day & Night              | AUTO (Day <--> Night TIME Change) , COLOR , B/W, EXTERN  |
| Language                 | ENG, CHN, CHN(S), JPN, KOR   |
| Temperature/Humidity     | Operating (-10°C~+50°C / 30%~80% RH) / Storage (-20°C~+60°C / 20%~90% RH)  |
| Power                    | DC12V [ AC24V / DC12V DualPower (option) ]   |
| signal Transmission      | The distant difference is occurred according to cable option and other circumstances.<br>(based on 5C-HFBT : UHD 100M) |

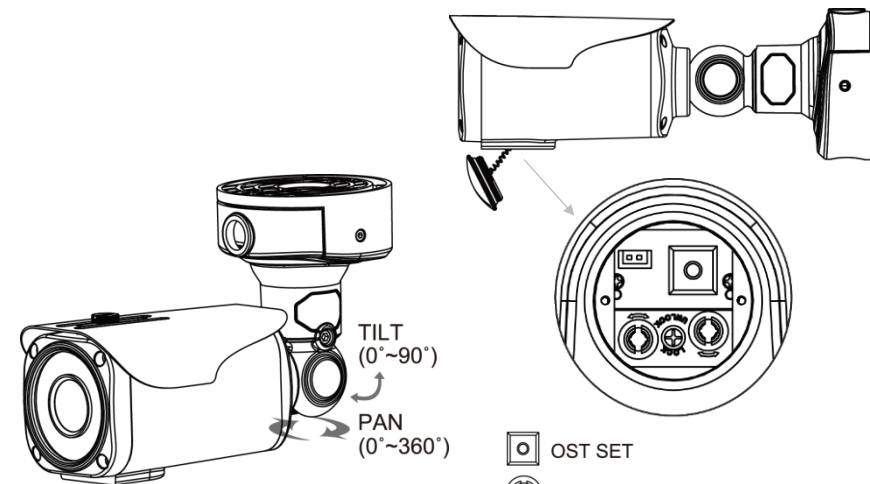

- OST SET
- Zoom & Focus (Varifocal camera)
- It is not possible to adjust Zoom Focus after tightening the screw with using the Phillips screwdriver but, it is possible after removing the screw.