



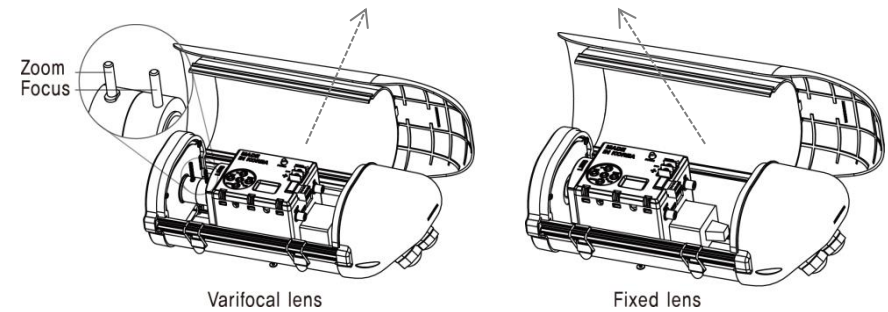

EX-SDI 2MP + Starvis

Easy Ceiling Wall Outdoor IR 12

| | |
|--------------------------|--|
| Resolution | 1080P, 720P |
| Lens | Fixed lens 3.6mm, 4mm, 6mm / V/F Lens 2.8~8mm, 2.8~12mm, 3.5~16mm |
| Sensor | 1/2.8 inch SONY CMOS (IMX-291) |
| Pixels | Total : 1945(H) x 1109(V) = 2.16M / Effective : 1945(H) X 1097(V) = 2.13M |
| Scanning System | PROGRESSIVE |
| S/N (Y signal) | More than 52 dB (AGC Off) |
| Video Output | SMPTE292M (EX-SDI, HD-SDI) / (TVI, CVI, CVBS: 1.0Vp-p (75ohm) : Option) |
| Min. Illumination | 0 Lux at IR On (IR LED 12) |
| White Balance | Auto / Auto Ext / Preset / Manual |
| Electronic shutter speed | AUTO / MANUAL (1/30sec ~ 1/30,000sec) / FLICKER |
| Function | DNR / ACE / WDR / BLC / HLC / Sens_up / Privacy / Flip / Motion / Defog / RS-485 / Sharpness / Smart IR / Brightness |
| Day & Night | AUTO (Day <-> Night TIME Change) , COLOR , B/W, EXTERN |
| Language | ENG, CHN, CHN(S), JPN, KOR |
| Temperature/Humidity | Operating (-10°C~+50°C / 30%~80% RH) / Storage (-20°C~+60°C / 20%~90% RH) |
| Power | DC12V [AC24V / DC12V DualPower (option)] |
| signal Transmission | The distant difference is occurred according to cable option and other circumstances. (based on 5C-HFBT : HD-SDI (200M) / EX-SDI (500M)) |

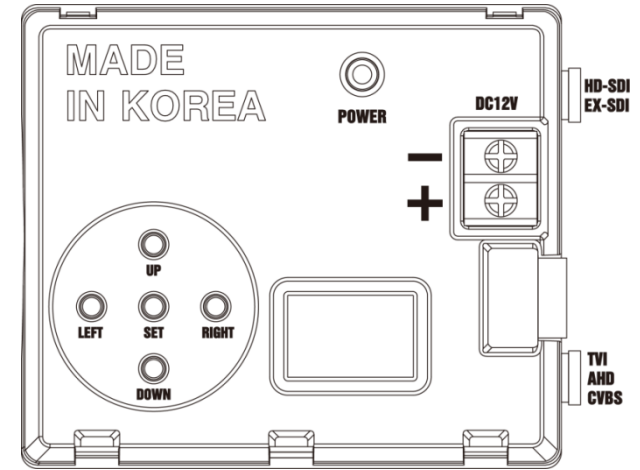

[Installation Features]

1. Control FUNCTION directly through UCC communicate of DVR and OSD KEY as well.
2. Select output image
 - EX-SDI : Right (R), Right (R), Set
 - TVI : Up (U), Up (U), Set
 - AHD : Down (D), Down (D), Set

[Recommended Distance]

1. Installation height of camera should be within 3M ~ 8M.
 - 6 ~ 50mm Lens: Shooting distance within 20M ~ 30M
 - 7 ~ 22mm Lens: Shooting distance within 15M ~ 25M
 - 16mm Lens: Shooting distance within 10M ~ 20M

