

IKST 04W 08W 16W




4CH, 8CH, 16CH
NETWORK VIDEO RECORDER



FEATURES

- Full GUI with alpha blending
- Individual setting of resolution, frame rates and picture quality
- Instant Replay, Digital Zoom, Mouse Control
- Weekly scheduler with holiday by 10 minutes setting
- Covert, Disable and Private function of cameras
- Motion Detection with 576 area setting
- Relay alarm output
- PTZ control by RS-485
- Daylight Saving Time and Network Time Setting
- Multi User Authority, Multi languages with full graphic
- Deinterlacer upon live and playback
- Individual Network port setting
- Auto Deletion, Mirroring function
- Interactive setup via network
- POS Interface

DIMENSIONS (mm)

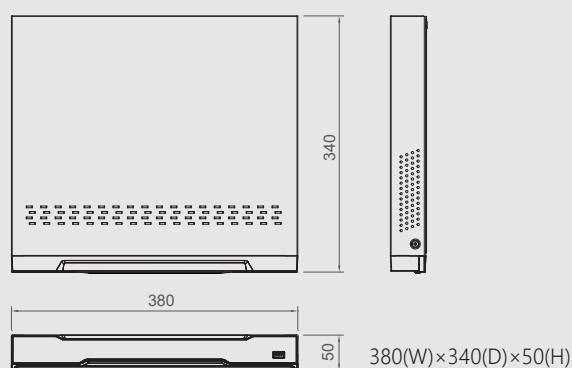

SPECIFICATIONS

		IKST 04W	IKST 08W	IKST 16W	
VIDEO	Camera input	4 PoE + 2-RJ45	8 PoE + 2-RJ45	16 PoE + 2-RJ45	
	IP	Number	4	8	16
		Camera Spec.	ONVIF 1812, RTSP, H.264/H.265, Dual stream		
	Output	1 HDMI (Main Display), 1 SPOT HDMI (Spot Display)			
AUDIO	input / output	2 RCA / 2 RCA			
Sensor in		16 (NC, NO selectable)			
Alarm out		2 Relay, 2 TTL			
Operating System		ubuntu 18.04			
DISPLAY	Speed	Real Time			
	Resolution(pixel)	1280X720, 1920X1080, 4M, UHD			
	Split screen	1, 4	1, 4, 6, 8, 9	1, 4, 6, 8, 9, 13, 16	
Main IPC	CODEC	H.264, H.265			
	Resolution(pixel)/ fps	main : upto 8MP@15 / dual : upto 720x480			
	Total Bitrate	320Mbps			
	Channel Bitrate	20Mbps			
PLAYBACK	Display	1, 4	1, 4, 6, 8, 9	1, 4, 6, 8, 9, 13, 16	
	Search mode	Calendar, Event , POS, Panorama, Thumbnail, Bookmark			
	Fast/Slow speed	Normal, REW & FF (recorded speed 2x, 4x, 8x, 16x, 32x, 64x, 1/2x, 1/4x), Frame to frame, Pause			
Backup device		Network, Thumb Drive			
Network Interface		Gigabit Ethernet			
The number of HDD		2 SATA (No capacity limit ; 10TB or more)			
Power Consumption		57.6W (48V)	96W (48V)	190W (SMPS)	
Operating Temperature		5~40°C (41~104°F)			
Relative Humidity		Max. 80% non-condensing			