

i5T4-RW-28

NDAA/TAA
Compliant product




*MAGIC IP H.265 ONVIF

- 5MP (2592x1944), Dual Stream
- Video Encoding H265/ H264
- 2.8mm Fixed lens
- Hi-power LED 2pcs (IR Range 20M)
- 0.01 Lux (color), WDR, 3D DNR, AWB
- 2way Audio(G711U/G711A coding), Alarm, Sensor
- IE6.0 and Above Browser/ P2P Cloud Service
- Built in SD card slot
- IP67, Turret type Dome, EASY Installation

SPECIFICATIONS

| | | |
|----------------------|---|---|
| Image Sensor | 1/2.8" SONY CMOS | |
| Resolution | 2592(H) x 1944(V), 5MP | |
| Lens | 2.8mm (F2.0) Fixed lens | |
| LED | Hi-power 2pcs (IR Range 20M) | |
| Video Compression | H.265 / H.264 | |
| Video Bit rate | CBR / VAR | |
| Frame Rate | Main Stream | 2592*1944, 2688*1520, 2560*1440, 2048*1520, 2304*1296, 1080P/720P@30Fps |
| | Sub Stream | D1/ VGA/ 640*360/ CIF@30fps |
| Shutter speed | Auto / Manual | |
| Day & Night | Automatic, External control, Manual, Timing | |
| Function | 3D DNR/ WDR (120dB) / BLC/ Privacy Mask, Flip mode, Saturation, Brightness, Contrast, Hue, Sharpness adjustable, AWB, Anti-face over-exposure , Defog | |
| Network | IE6.0 , Safari, Chrome, FireFox, Opera, Edge Browser | |
| Protocol | HTTP / RTSP / DHCP / NTP / ONVIF, optional GB28181, RTMP | |
| System Compatibility | ONVIF T v17.06 (TBD) | |
| Interface | RJ45 | |
| SD Storage | max. 128GB | |
| Audio in/out | Support, Codec G711U/G711A | |
| Alarm / Sensor / PoE | Support | |
| Power Supply | DC12V | |
| Temperature/Humidity | Operating (-10~ +50°C / 30~80% RH) | |

DIMENSIONS (mm)

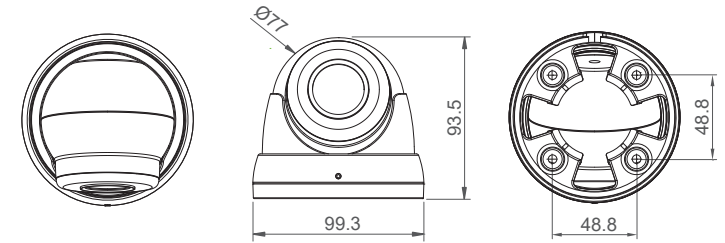

INSTALLATION

- Place the camera base mount at the pre-drilled installation position and route the power/network cable to the connecting place.
- Fix the base mount by using mounting screws.
- Attach the ball assey and rings
- Adjust the camera's viewing angle (Pan, Tilt)
- Tighten screws with L-wrench to fix the camera.

